LAMIERS ENVIRONMENTAL SUPER PRO

FOR ALL YOUR SPECIALISED JOBS AND THOSE REQUIRING HEAVY CUTTING CAPACITY

Special mini excavator

Brush-cutting version with 1600 cutter bar

Thinning version with 1700 cutter bar

Pruning

1900 Single blade

Special reshaping of trees

2900 Version

Lamier	Length (m)	Number of disks / blades	Diameter (mm)	Thickness of the blades (mm)	Number of saw teeth	Weight (kg)	Flow rate (l/min)	Pressure (bar)	Rotation speed (RPM)
ENVIRONMENTAL SUPER PRO Range									
1600	0,6	**1**	600	3	96	70	28-85	170-95	2000
1700	0,7	**1**	700	4	80	120	35-85	170-95	2000
1900	0,9	**1**	900	5	80	140	85	180	1800
2900	1,55	**2**	900	5	80-120	191	85	180	1800

Coupéco
UNE DIFFÉRENCE DE TAILLE

ZI du Chail - 17800 PONS
FRANCE
Tél. +33 (0)5 46 96 25 50
Fax. +33 (0)5 46 94 64 72

coupeco@coupeco.com

Eager to constantly evolve its products, COUPECO reserves the right to modify its machines without notice.
Photos and data are not contractual. Photo credits: Phovoir - Shutterstock - Coupeco 10/2019 **blue-cem.fr**

Coupéco
UNE DIFFÉRENCE DE TAILLE

LAMIERS ENVIRONMENTAL PRO

600 Series
from 1.10m to 2.45m

The most versatile for maintaining and reshaping hedges.

max. 200mm 30mm



650 Series
from 1.60m to 2.50m

Recommended for all your road-side trimming jobs, power lines, borders and edges of fields.

max. 215mm 30mm



Lamier	Length (m)	Number of disks / blades	Diameter (mm)	Thickness of the blades (mm)	Number of saw teeth	Weight (kg)	Flow rate (l/min)	Pressure (bar)	Rotation speed (RPM)
ENVIRONMENTAL PRO Range									
2600	1,07	**2**	600	3,5	96-120	120	75-85	95	2000
3600	1,51	**3**	600	3,5	96-120	140	75-85	95	2000
4600	1,98	**4**	600	3,5	96-120	185	75-85	95	2000
5600	2,45	**5**	600	3,5	96-120	225	75-85	95	2000
3650	1,57	**3**	650	4	80-120	175	75-85	140	2000
4650	2,05	**4**	650	4	80-120	225	75-85	140	2000
5650	2,5	**5**	650	4	80-120	275	75-85	140	2000

LAMIERS GREEN SPACES

STRAIGHT-LINED TRIM

600S Series
from 1.5m to 3.35m

This model has been designed for all types of carriers (mowers, telescopic, excavators). The 600S (synchronous) cutter bar gives you the option to carry out conventional pruning AND top trimming of ornamental hedges for a STRAIGHT-LINE finish.

max. 100mm 25mm





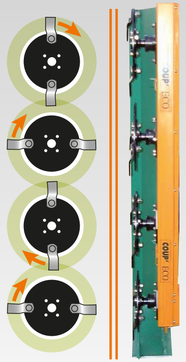

Straight-line cut

500S Series
from 1.2m to 2.3m

Reinforced version of Galax cutters. Ideal for detailed work on ornamental hedges. The layout of the disks and the rotational speed gives it more cutting power.

max. n.a. 25mm

max. n.a. 25mm

LAP Series
anti-projection effect mulching

The protective covers ensure that you can keep cutting without projection or waste to pick up.

IDEAL FOR PUBLIC SPACES AND MOTORWAYS

Lamier	Length (m)	Number of disks / blades	Diameter (mm)	Thickness of the blades (mm)	Number of saw teeth	Weight (kg)	Flow rate (l/min)	Pressure (bar)	Rotation speed (RPM)
GREEN SPACES Range									
3500s	1,23	**3**	500	NA		66	28-45	170-120	2500
4500s	1,59	**4**	500	NA		88	28-45	170-120	2500
5500s	1,96	**5**	500	NA		110	28-45	170-120	2500
6500s	2,32	**6**	500	NA		132	28-45	170-120	2500
3500 LAP	1,23	**3**	500	NA		86	28-45	170-120	2500
4500 LAP	1,59	**4**	500	NA		113	28-45	170-120	2500
5500 LAP	1,96	**5**	500	NA		140	28-45	170-120	2500
3600s	1,49	**3**	556	3,5	96-120	140	45-85	170-95	2000
4600s	1,96	**4**	556	3,5	96-120	185	45-85	170-95	2000
5600s	2,43	**5**	556	3,5	96-120	225	45-85	170-95	2000
6600s	2,89	**6**	556	3,5	96-120	265	45-85	170-95	2000
7600s	3,35	**7**	556	3,5	96-120	306	45-85	170-95	2000

LAMIERS AGRI / ARBO

500 Series
from 1.2m to 3.40m
Best cutter in the AGRI range

Designed to cut branches with its saw blades, it is very powerful. Equipped with saw disks, used a lot in arboriculture.

max. 165mm 25mm



600 Series
from 1m to 4.30m

Excellent cutting capacity with this versatile cutter bar. Ideal for maintaining field borders. Special tall height for arboriculture Recommended for farmers and agricultural contractors.



max. 200mm 30mm

Lamier	Length (m)	Number of disks / blades	Diameter (mm)	Thickness of the blades (mm)	Number of saw teeth	Weight (kg)	Flow rate (l/min)	Pressure (bar)	Rotation speed (RPM)
AGRI / ARBO RANGE									
3500	1,23	**3**	500	3	96-120	66	28-45	170-120	2500
4500	1,59	**4**	500	3	96-120	88	28-45	170-120	2500
5500	1,96	**5**	500	3	96-120	110	28-45	170-120	2500
6500	2,32	**6**	500	3	96-120	132	35-45	170-120	2500
7500	2,69	**7**	500	3	96-120	154	35-45	170-120	2500
8500	3,05	**8**	500	3	96-120	176	45	170-120	2500
9500	3,42	**9**	500	3	96-120	198	45	170	2500
2600	1,07	**2**	600	3,5	96-120	120	45	170	2000
3600	1,51	**3**	600	3,5	96-120	140	45	170	2000
4600	1,98	**4**	600	3,5	96-120	185	45	170	2000
5600	2,45	**5**	600	3,5	96-120	225	45	170	2000
6600	2,91	**6**	600	3,5	96-120	265	45	170	2000
7600	3,37	**7**	600	3,5	96-120	306	45	170	2000
8600	3,83	**8**	600	3,5	96-120	346	45	170	2000
9600	4,29	**9**	600	3,5	96-120	392	45	170	2000