



meteOr
P 360

Special pruning
UP TO 50 CM
The inaccessible
in any configuration
Available in two versions:
700 single blade and 900 single blade

- Reinforced cylinders
- Reinforced serial cutter bars
- Recharge valve (free-wheel)
- Flow divider
- Pressure limiter
- Electric controls independent of the cylinders via function selector positioned in the cab



Ideal for all tree lopping work Compact for excavators from 8 T.
Promotes healing close to the trunk for quality pruning.

OPTIONAL

- Quick attachment to all brands

Meteor	Lamier	Cutting length	Cutting capacity of cutting disks (mm)	Cutting capacity of saw blades (mm)	Rotation speed (RPM)	Flow rate (L/min)	Pressure (bar)	Weight (kg)
P360	1700	0.7	30	240	2000	45/85	140/170	530
P360	1900	0.9	NA	500	1800	85	140	580



CUSTOM INSTALLATIONS
CONTACT US

Coupeco
UNE DIFFÉRENCE DE TAILLE

ZI du Chail - 17800 PONS - FRANCE
Tel. +33 (0)5 46 96 25 50
coupeco@coupeco.com

www.coupeco.com



Eager to constantly evolve its products, COUP'ECO reserves the right to modify its machines without notice.
Photos and data are not contractual. Photo credits: iStock® - Coupeco 05/2018 - blue-cm.fr



meteOr

SOLUTION FOR PRUNING
ALL YOUR NEEDS



Coupeco
UNE DIFFÉRENCE DE TAILLE



ON EXCAVATORS: SO SIMPLE

Ideal for thinning of field edges and cleaning up wooded areas



- 2 working positions right or left
- Horizontality via excavator equalizer
- Quality manufacturing



OPTIONAL

- Centred position to work in both directions of movement
- INTENSIVE use cutters
- Extension for work at great height
- Hydraulic protections
- Quick attachment to all brands

Lamier	Length (m)	Number of disks / blades	Cutting capacity of saw blades (mm)	Weight (kg)	Flow rate (L/min)	Pressure (bar)	Weight Mini Excavator (T)	Rotation speed (RPM)
3500	1.23	3	10	66	28-45	170-120	2.5	2500
4500	1.59	4	10	88	28-45	170-120	2.5	2500
3600	1.50	3	18	140	45-85	170-95	4	2000
4600	2	4	18	185	45-85	170-95	5	2000
3700	1.54	3	22	175	85	95	5	2000
4700	2.05	4	22	230	85	95	8	2000
1600	0.6	1	18	70	35-85	170-95	2.5	2000
1700	0.7	1	22	120	35-85	170-95	2.5	2000
1900	0.9	1	40	140	85	140	8	1800



P 90

PROFESSIONAL and versatile,
ideal for your first straight-forward trimming jobs
Designed to fit excavators from 5 T




- 2 working positions right or left
- Horizontality via equalizer
- Serial recharge valve (free-wheel) which secures the equipment
- Steering control cylinder



Selection of multi-purpose cutter bar(s) and/or saw blades for trimming maintenance, and the large-diameter single blade cutter for lopping branches. Hydraulic line feed of the excavator, with controls in the cab.

OPTIONAL

- INTENSIVE use cutters
- Flexible kit
- Quick attachment to all brands
- Flow regulator and pressure limiter for safe connection to your excavator
- Left and right work position

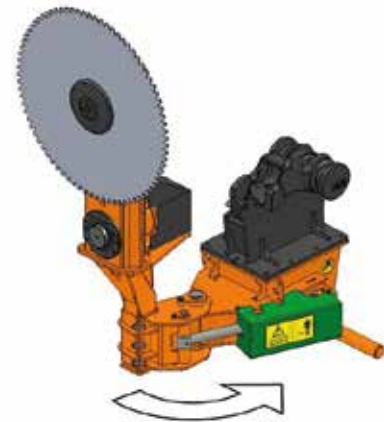

Meteor	Lamier	Cutting length	Cutting capacity of cutting disks (mm)	Cutting capacity of saw blades (mm)	Rotation speed (RPM)	Flow rate (L/min)	Pressure (bar)	Weight (kg)
P90	3600	1.5	30	170	2000	45-85	170-95	365
P90	4600	1.98	30	170	2000	45-85	170-95	395
P90	3700	1.68	30	240	2000	85	140	445
P90	4700	2.2	30	240	2000	85	140	500
P90	5700	2.65	30	240	2000	85	140	565
P90	1900	0.9	NA	+400	1800	85	180	460
P90	2900	1.55	NA	+400	1800	85	180	525



P 180

THE BENCHMARK
for road-side trimming
Designed to fit excavators from 12 T




- Remote arm for right or left work
- Horizontality in any configuration
- Control cylinders
- Serial heavy duty cutters
- Pressure limiter, flow regulator and recharge valve
- Electric controls independent of the cylinders



Ideal for all difficult work involving extending and folding at maximum height for the equalizer. Ideally suited for road edges with thick plant growth thanks to the cutter bar positioning hinges on the right or left for better safety.

The safe bet for contractors and communities.

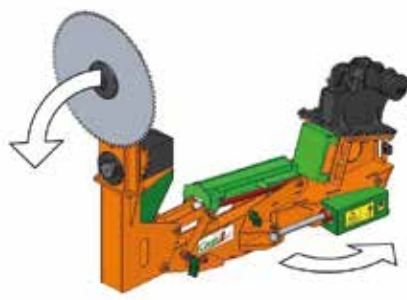

OPTIONAL

- Left and right work position
- Quick attachment to all brands



Meteor	Lamier	Cutting length	Cutting capacity of cutting disks (mm)	Cutting capacity of saw blades (mm)	Rotation speed (RPM)	Flow rate (L/min)	Pressure (bar)	Weight (kg)
P180	3700	1.68	30	240	2000	85	140	700
P180	4700	2.2	30	240	2000	85	140	750
P180	5700	2.65	30	240	1800	85	140	810
P180	1900	0.9	NA	+400	1800	85	180	720
P180	2900	1.55	NA	+400	1800	85	180	760